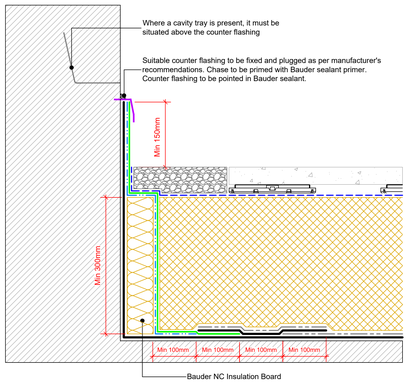

Insulated Upstands - Non Combustible Thermal Break - Suitable Flashing
(Drg.No: D0700-00I_201-006)

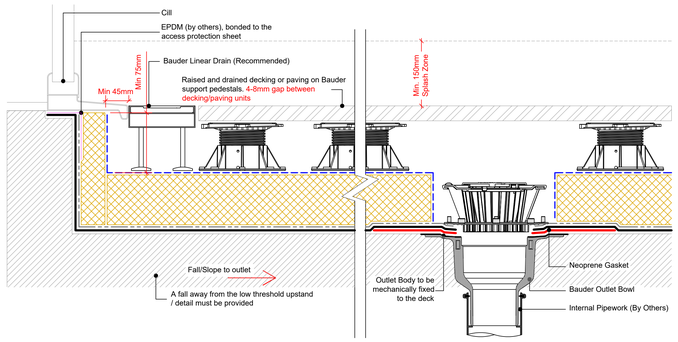

Insulated Upstands - Level Threshold - With Outlet
(Drg.No: D0700-00I_001-005)

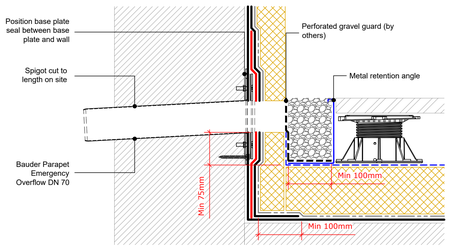

Insulated Upstands - Emergency Overflow
(Drg.No: D0700-00I_206-004)

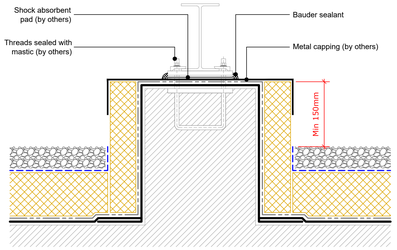

BMV Track Detail
(Drg.No: D0700-00I_202-003)

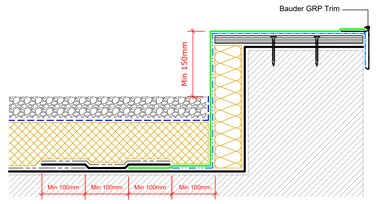

Insulated Upstands - Felt Capping - GRP Trim
(Drg.No: D0700-00I_203-003)



GRP joints
All GRP trim joints to incorporate internal jointing sleeves and an additional layer of underlayer with an overhang of at least 25mm to bridge the joint.



Change In Level - Without Step
(Drg.No: D0700-00I_010-005)

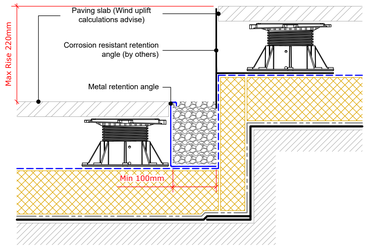

Insulated Upstands - Change In Level - Bauder Support Pedestals
(Drg.No: D0700-00I_210-006)

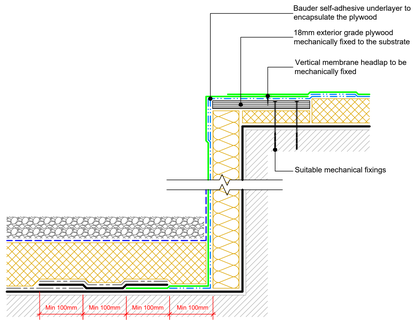

Insulated Upstands - Change In Level - Lift Overun
(Drg.No: D0700-00I_210-007)

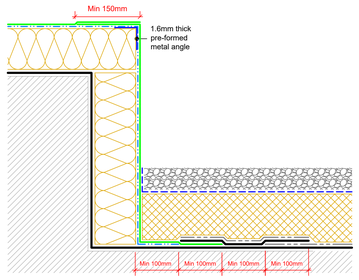

Insulated Upstands - Change In Level - Warm Roof Upstand
(Drg.No: D0700-00I_210-008)

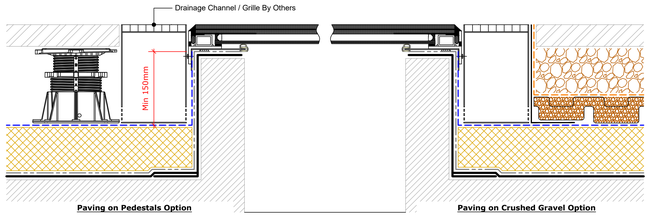

Walk On Glazing (Section A-A)
(Drg.No: D0700-00I_009-003)

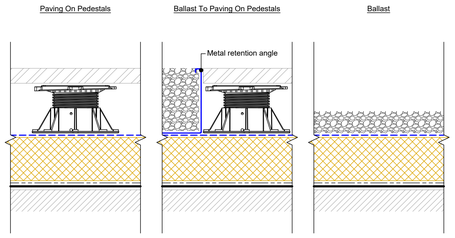

Build-Up Options



BauderGLAS Build-Up Options

Key

- Paving / Brickwork
- Crushed Gravel
- SUB-MD UK Mineral Drain
- DSE Drainage Board (Refer to the specification for the correct board to be used)
- Ballast
- Bauder Capping Sheet (For all Green Roof details use Bauder Root Resistant Cap Sheet)
- Bauder Underlayer
- Proprietary counter flashing
- FV 125 100 / 200 Filter Fleece - 1m / 2m Roll
- Bauder SDF Mat Or DE NF 10 Drainage Layer
- Bauder WFRL
- Bauder Inverted Insulation
- Bauder Insulation
- EPDM By others
- Bauder AP1 Access Sheet
- Bauder Bakor Hotmelt Membrane Incorporating **Polyester** Reinforcement
- Bauder Bakor Hotmelt Membrane Incorporating **Neoprene** Reinforcement
- Deck / Substrate

IMPORTANT NOTE:
This Drawing Shows Alternative Details. For The Correct Solution To Be Used, Refer To The Project Specific Specification.

IMPORTANT NOTES:
1. This detail is suitable for the following Bauder Systems: **Bauder Hotmelt**
2. Do not scale to ascertain dimensions.
3. All dimensions are in Millimetres and are to be checked and verified on site prior to commencement of work.
4. This drawing is to be read in conjunction with the specification and associated drawings.
5. This detail is a guideline only, representing typical detailing conditions and illustrate the correct application of the above Bauder System. It may be necessary to modify this detail to suit specific project design constraints and conditions.
6. **Refer to the Bauder Specification for the deck type, product description and method of application. For clarity the method of attachment has not been shown.**
7. Provision should be made by the installer for mechanically fixing the top leading edge of all upstand details in excess of 250mm in height using appropriate fasteners.

BAUDER
making roofs secure.

UK OFFICE
Bauder Limited
70 Landseer Road, Ipswich, Suffolk IP3 0DH, England.
Tel: +44 (0)1473 257671
Email: technical@bauder.co.uk
bauder.co.uk

IRELAND OFFICE
Bauder Limited
5th Floor, Block D, Iveagh Court, Harcourt Road, Dublin 2. D02 VH94 Ireland.
Email: technical@bauder.ie
bauder.ie

HOTMELT TYPICAL DETAILS (Insulated Upstands) Sheet 2 of 2

Scale:	Drawing Number	Rev:
1:5 @ A0	D0700-00I_200-002	E

Drawn By:	Checked By:	Approved By:	Date:
HI	JO	JM	09/10/2026

© Copyright. This drawing is subject to copyright. No part of this document may be reproduced in any form, without the permission of BAUDER LTD.