

## Single Ply warm roof mechanically fastened with PIR insulation

### BauderTHERMOPLAN FPO Single Ply System


Mechanically fastened, warm roof, single ply membrane waterproofing system suitable for new build, refurbishment and extensive green roof applications.

	Function	Product name	Thickness (mm)	Weight (kg/m <sup>2</sup> )
1	Waterproofing	BauderTHERMOPLAN T 15	1.5	1.8
2	Insulation & membrane attachment method	Mechanically fastened	Nominal	Nominal
3	Insulation (0.15)	BauderPIR FA Flatboard	140	4.2
4	Air and vapour control layer (AVCL)	BauderTEC DBR 06	0.6	0.7
<b>System Build-up</b>			<b>142.10</b>	<b>6.70</b>

In-depth and up-to-date product specific technical data is available for each element within a system.

Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

Warm roof indicative build-up

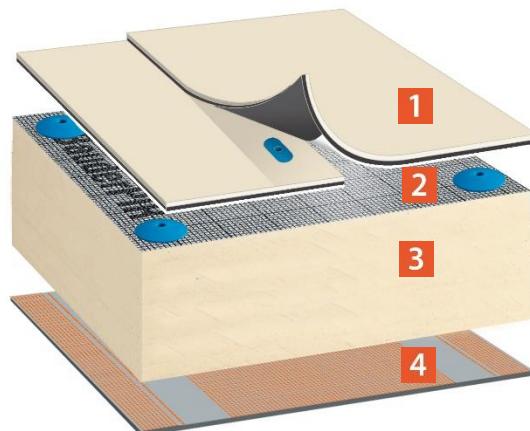

#### Characteristics of the system

- Flame free installation using hot air welding
- Light weight membrane, typically 2-3kg/m<sup>2</sup>
- High performance halogen-free fire retardant
- Approved for green roof landscaping by FLL
- Our guarantee offer is clear and concise covering what is included/not included along with the conditions of the guarantee. A sample guarantee for this system is available on request.

# System summary

## Accreditations and approvals



System variations are available to the specifier so that a tailored solution meets the needs of the building. The selection of products should be confirmed with our technical department to ensure suitability for the individual construction requirements of the flat roof.

E: [technical@bauder.co.uk](mailto:technical@bauder.co.uk)

T: 01473 257671

## OPTIONS AVAILABLE

In-depth and up-to-date product specific technical data is available for each component within a system.

Download from our website [bauder.co.uk/technical-centre](http://bauder.co.uk/technical-centre)

Membrane finish colours		
	Silver Grey (RAL 7001)	Pearl White (RAL 1013)

Membrane alternatives	Thickness (mm)	Weight (kg/m <sup>2</sup> )	Membrane AVCL alternatives	Thickness (mm)	Weight (kg/m <sup>2</sup> )
BauderTHERMOPLAN T 12	1.2	1.5	BauderSYN DB-PE 100	0.16	0.15
BauderTHERMOPLAN T 20	2.0	2.4	BauderTEC KSD Foil	1.5	1.8

BauderPIR FA Flatboard Insulation thickness	Approx. 'U' VALUE (W/m <sup>2</sup> K)	Weight (kg/m <sup>2</sup> )	Alternative insulation to achieve 'U' VALUE 0.15 (W/m <sup>2</sup> K)	Thickness (mm)	Weight (kg/m <sup>2</sup> )
120mm	0.17/018	3.6	BauderPIR FA G16 tapered	140 average	4.2
140mm	0.15	4.2	BauderPIR FA-TE flatboard	140	4.2
160mm	0.13	4.8	BauderROCK flat/tapered	265/265 average	42.4
200mm	0.11	6.0	BauderGLAS flat/tapered	240/240 average	24.0

Approx. 'U' VALUE (W/m<sup>2</sup>K) assuming concrete or timber deck and does not take into account any materials below the deck

## System fire performance

Please contact the Bauder Technical Dept to check if the system assembly stated has an independently tested performance against fire.