

## BauderROCK Flatboard Insulation

02.12.2025

### Product description

BauderROCK is a dual density mineral wool insulation board with a multi-purpose facing applied to the top surface to allow waterproofing membranes to be mechanically fixed, torch-applied or adhered. The dual density composition provides compressive strength, whilst keeping the overall weight to a minimum.  
The underside of the board is un-faced, so bare Rock. Where more than one layer of insulation is required to hit the target U Value, an un-faced base layer is used.



### Application fields

For use within Bauder warm roof systems, particularly in applications where there is a demand for high noise reduction/absorption. Can be used with self-adhesive, torch-applied, adhered or mech-fixed membranes.

### Facing

Top: Glass fibre fleece  
Bottom: Raw (un-faced)

### Board edge

Square (not rebated)

### Available Thicknesses (faced)

60, 85, 105, 115, 150 & 185mm

### Available Thicknesses (un-faced)

120 & 150mm

Characteristic	Test Method	Unit	Value
Length	EN 822	mm	1200
Width	EN 822	mm	1000
Thickness	EN 823	mm	Faced = 60, 85, 105, 115, 150 & 185 Un-faced = 120 & 150  <i>170mm faced and un-faced board available as special-order product – minimum order quantity of 436.8m<sup>2</sup> (52 pallets).</i>
Density	EN 1602	Kg/m <sup>3</sup>	160
Thermal Conductivity ( $\lambda_D$ )	EN ISO 10456	W/mK	$\lambda_D \leq 0.039$
Reaction to fire	EN 13501-1		Faced board = Euroclass A2-s1, d0 Un-faced board = Euroclass A1

### Storage guidance

Store the materials outdoors with suitable robust UV resistant, flame-retardant tarpaulin. Ensure the product(s) are clear of buildings and any other storage areas. The products must not be exposed to a direct naked flame or other ignition sources, or to solvents or other chemicals. All insulation boards must be kept dry, on pallets and off the ground. The packaging of Bauder Insulation products should not be considered adequate for weather protection. Where there are storage containers on site, these may be suitable for storing products.

### Packaging material

BauderROCK insulation boards are fully palletised and wrapped in a polythene shroud for protection during transit and for short-term protection if stored outside. Boards should be stacked no more than two pallets high for safety reasons. A pallet collection service is available for a minimum of 30 pallets. The pallet collection telephone number is 0800 282488.

### Handling/PPE

All persons using the product should be fully aware of the manual handling methods as roofing materials are heavy and can cause serious injury. When using the product, installers should be provided with, and wear, suitable personal protective equipment. PPE should include appropriate safety goggles when cutting, drilling, or abrading to protect against dust/projectile material. Wear the PPE generally required for the jobsite with a minimum of gloves to protect hands and a suitable dust mask to protect against dust inhalation. Safety glasses and gloves are a must when handling, cutting, BauderROCK Insulation. Wear safety glasses with side shields or dust goggles in dusty environments. Wear goggles for dust protection while cutting in windy conditions.

The use of a pallet fork is recommended where a crane is required to lift pallets to roof level.

### Disposal guidance

Disposing of any waste material must be carried out in accordance to national regulations.

### Re-use options of product

Please refer to EPD stated below in Certification and environmental information.

### Further information/ documents

Current documents such as brochures, installation guides, etc. can be found by visiting [www.bauder.co.uk](http://www.bauder.co.uk)

# Technical data sheet

<b>BBA Certificate No:</b>	21/5878
<b>International Standards Organisation (ISO)</b>	<b>ISO 14001:2015 Environmental Management Certificates</b> Certificate EMS70301
	<b>ISO 50001: 2018 Energy Management</b> Certificate 24714
	<b>ISO 45001: 2018 Occupational H &amp; S Management System</b> Certificate 45IVB/224969
	<b>ISO 9001:2015 Quality Management</b> Certificates EN1271 (UK)


**Installation Guidance:** Please refer to the Bauder Installation Guide and project specification for guidance.

- BauderROCK must be installed in dry conditions.
- BauderROCK to be bonded in the specified Bauder adhesive.
- The top of the faced boards must be swept prior to installation of the Activator-Primer and subsequent self-adhesive underlayer. Not necessary for torch-applied underlayers.
- BauderROCK Insulation is easily trimmed and shaped, therefore if the substrate or abutment is uneven, it's easy to modify the insulation by cutting to fit.
- Glass fibre fleece must be installed uppermost in a single-layer and multi-layer system.

## Two Layer system:

Each insulation layer is offset relative to the other. The best staggered overlap is 150mm or more. Infill pieces must have a minimum width of 150mm. The base layer (un-faced) should always be installed with staggered joints, with minimum stagger of 150mm (Picture below - dotted line). The insulation top layer, should always be installed with staggered joints, with minimum stagger of 150mm (Picture below - black line). To maximise insulating performance ALL abutments and insulation joints MUST be tightly butted up. If necessary, re-measure, replace or cut and re-install any insulation which is not fitting correctly. Also ensure BauderROCK Insulation is tight with no gaps where it meets rooflights, walls, edge details and other services which perforate the roof deck.

See blue dotted line = BauderROCK un-faced board    Black full lines = BauderROCK faced board.

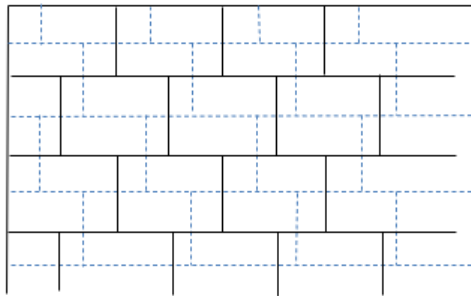

## Design Considerations:

For free spanning over a metal deck, the minimum board thickness is equal to the maximum trough width divided by 3. The maximum trough width suitable for free spanning is 300mm.

It is an industry recommendation that a supporting layer be placed upon the roof both during installation and upon completion in designated walkways or in areas of high foot traffic. Please contact Bauder Ltd regarding available options.

Wherever possible, any roof-mounted plant, such as air handling units, should be positioned on independent upstands bearing directly onto the substrate. Where this is not possible, and the equipment is to be placed directly onto the finished roof surface, further protection may be required to spread the load on the insulation boards. In such cases, please contact Bauder Ltd to discuss the best course of action.

**Safety Data Sheets are designed to provide the necessary information to recipients of substances and mixtures in the EU & UK. This product is classed as an article; therefore, this product does not have a requirement for a Safety Data Sheet.**



DoP can be found via the website



DoC can be found via the website