

Upstand
(Drg.No: D0901/03-00W_0-4Deg_201-ExtInt-S-DB_001)

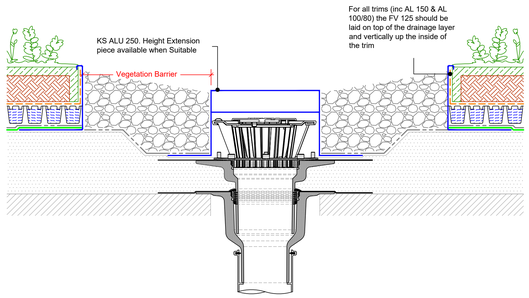

Bauder Outlet - Compact
(Drg.No: D0901/03-00W_0-4Deg_006-ExtInt-S-DB_001)

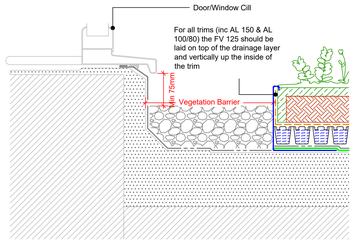

Upstand to Raised Cill
(Drg.No: D0901/03-00W_0-4Deg_001-ExtInt-S-DB_003)

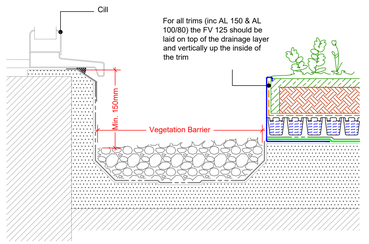

Internal Gutter to Clerestory Window
(Drg.No: D0901/03-00W_0-4Deg_206-ExtInt-S-DB_003)



Perimeter Kerb
(Drg.No: D0901/03-00W_0-4Deg_002-ExtInt-S-DB_001)

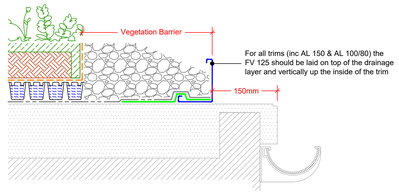

External Gutter
(Drg.No: D0901/03-00W_0-4Deg_006-ExtInt-S-DB_005)

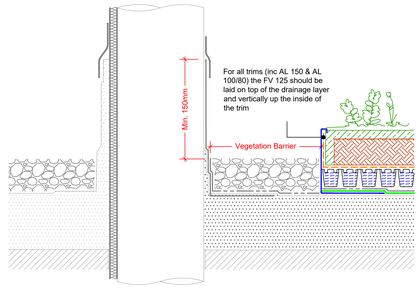

Upstand to Hot Flue or Cold Pipe
(Drg.No: D0901/03-00W_0-4Deg_007-ExtInt-S-DB_002)

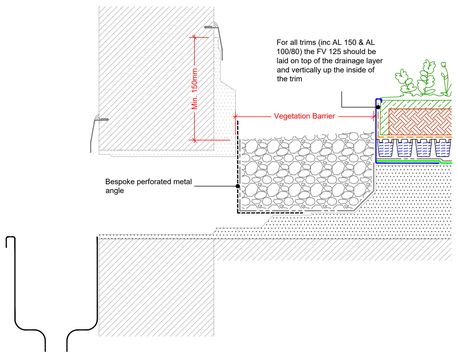

Upstand - Lead Chute
(Drg.No: D0901/03-00W_0-4Deg_206-ExtInt-S-DB_002)

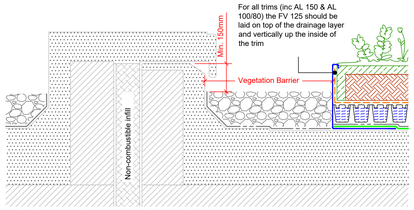

Twin Kerb Expansion Joint
(Drg.No: D0901/03-00W_0-4Deg_204-ExtInt-S-DB_001)

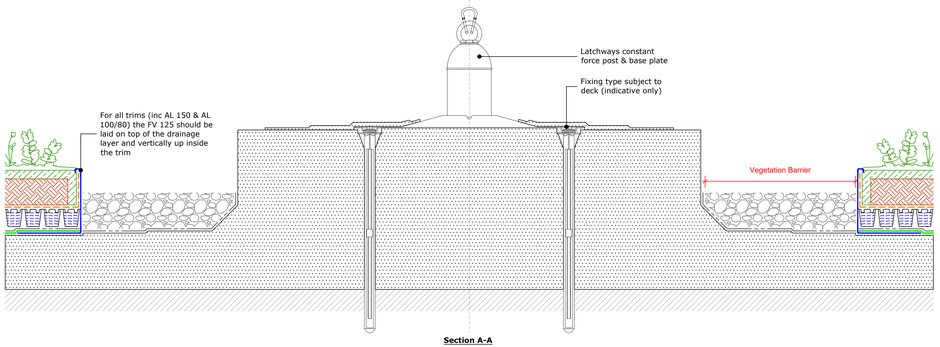

Section A-A

Latchways Constant Force Post
(Drg.No: D0901/03-00W_0-4Deg_009-ExtInt-S-DB_001)

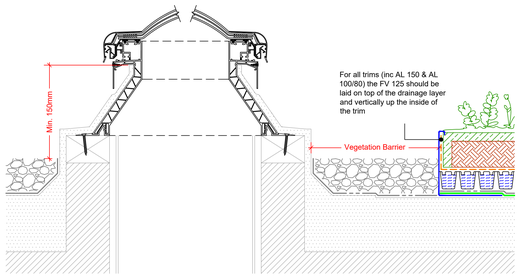

Upstand to Bauder Rooflight - Euroglaze
(Drg.No: D0901/03-00W_0-4Deg_008-ExtInt-S-DB_001)

Vegetation Termination Detail

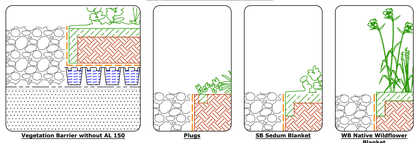

Vegetation Barrier without AL 150 | Plugs | SB Sedum Blanket | WB Native Wildflower Blanket

All vegetation blankets must be folded 90° at the junction with the vegetation barrier.

BauderGREEN SB Sedum Blanket **(DSE 20)** ***Alternative drainage board options available***

BauderGREEN WB Native Wildflower Blanket **(DSE 40)**

BauderGREEN Flora Seed Mix And / Or Bauder Native Plug Plants **(DSE 40)**

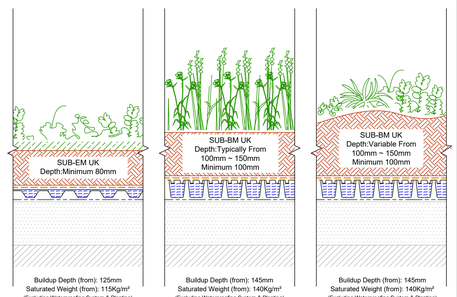

Buildup Depth (from): 125mm
Saturated Weight (from): 115Kg/m²
(Excluding Waterproofing System & Planting)

Buildup Depth (from): 145mm
Saturated Weight (from): 140Kg/m²
(Excluding Waterproofing System & Planting)

Buildup Depth (from): 145mm
Saturated Weight (from): 140Kg/m²
(Excluding Waterproofing System & Planting)

Extensive Soft Landscaping

Grass / Turf **(DSE 40)** ***Alternative drainage board options available***

Planting (Medium Sized Mix Planting) **(DSE 40)** ***Alternative drainage board options available***

Planting (Large Sized Shrubs / Trees) **(DSE 60)** ***Alternative drainage board options available***

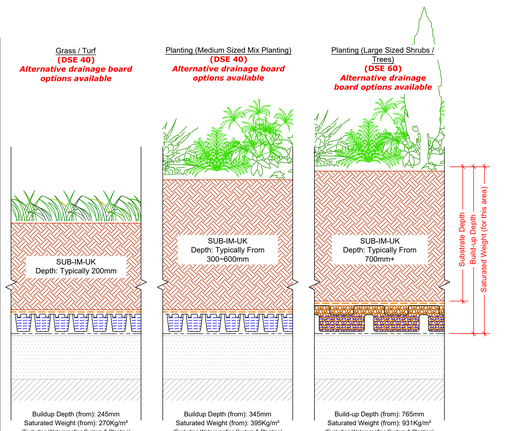

Buildup Depth (from): 245mm
Saturated Weight (from): 270Kg/m²
(Excluding Waterproofing System & Planting)

Buildup Depth (from): 345mm
Saturated Weight (from): 395Kg/m²
(Excluding Waterproofing System & Planting)

Buildup-up Depth (from): 765mm
Saturated Weight (from): 931Kg/m²
(Excluding Waterproofing System & Planting)

Intensive Soft Landscaping

Substrate Based Landscape Options

(Heights and weight loadings may vary, allowance must be made for any fully established planting / vegetation and landscaping)

Key



Plug / Seed Mix Planting | BauderGREEN WB Native Wildflower Blanket | BauderGREEN SB Sedum Blanket

(Vegetation type is indicative only. Refer to the specification for the correct vegetation to be Used)

SUB-EM UK Extensive Substrate / SUB-IM UK Intensive Substrate / SUB-BM UK Biodiverse Substrate

DSE40 Drainage Board (Refer to the specification for the correct board to be used)

FV 125 100 / 200 Filter Fleece - 1m / 2m Roll

FSM600 Protection Mat

Additional Bauder Capping Sheet / Membrane to secure the metal trim (Refer to the Specification for the correct option)

Bauder Waterproofing System. (Refer to the specific Bauder waterproofing details drawings for further information.)

Deck / Substrate

Vegetation Barrier - **Minimum depth 75mm & 550mm wide for mop details, as per GRO Code. Refer to GRO Code if required.**

AL150 Edge / Drainage trim. Secured in place by separate pieces of torch applied Bauder Plant-E Capping Sheet. For vegetation/substrate build-up depths greater than 150mm, a bespoke perforated edge/drainage trim is required.

IMPORTANT NOTE:
This drawing shows alternative details. For the correct solution to be used, refer to the project specific specification.

IMPORTANT NOTES:
1. This detail is suitable for the following Bauder Systems: **Bauder Total Green Roof System, BauderFlex Green, Thermofol and Thermoplan (Excluding Intensive).**
2. Do not scale to ascertain dimensions.
3. All dimensions are in Millimetres and are to be checked and verified on site prior to commencement of work.
4. This drawing is to be read in conjunction with the specification and associated drawings.
5. This detail is a guideline only, representing typical detailing conditions and illustrate the correct application of the above Bauder System. It may be necessary to modify this detail to suit specific project conditions and site circumstances.
6. **Refer to the Bauder specification for the correct product description and method of application. For clarity the method of attachment has not been shown.**
7. Provision should be made by the installer for mechanically fixing the top leading edge of all upstand details in excess of 250mm in height using appropriate fasteners.

BAUDER
making roofs secure.

UK OFFICE
Bauder Limited
70 Landseer Road, Ipswich, Suffolk IP3 0DH, England.
Tel: +44 (0)1473 257671
Email: technical@bauder.co.uk
bauder.co.uk

IRELAND OFFICE
Bauder Limited
5th Floor, Block D, Iveagh Court, Harcourt Road, Dublin 2, D02 VH94 Ireland.
Email: technical@bauder.ie
bauder.ie

Extensive/Intensive Green Roof System (0°-4° Slope)

Scale:	Drawing Number	Rev:
1:5 @ A0	D0901/03-00W_0-4Deg_200-ExtInt-S-DB_001	C
Drawn By: ASH	Checked By: JO	Approved By: CN	Date: 30/09/2026

© Copyright. This drawing is subject to copyright. No part of this document may be reproduced in any form, without the permission of BAUDER LTD.